

DESCRIPTION

ULTRAMELT is a premium quality carbon bonded silicon carbide crucible manufactured by high pressure iso-static pressing.

ULTRAMELT incorporates Morganite's advanced bonding technology and is a superior grade product designed to provide optimum performance under the most arduous service conditions.

APPLICATIONS

ULTRAMELT offers superior performance for aggressive erosive conditions with heavy flux usage in both copper based alloys and precious metal reclamation. The product is designed for use in gas, oil, and low to medium frequency induction furnaces.

TYPICAL METAL CASTING TEMPERATURE

1000 - 1400°C (1830 - 2550°F)

PERFORMANCE CHARACTERISTICS

- Superior erosion resistance
- Maximum resistance to corrosive chemicals and slags
- Excellent thermal shock resistance
- High mechanical strength
- High consistent density
- Faster melting speed

IDENTIFICATION

ULTRAMELT crucibles are coloured black and utilise pattern coding with the suffix ULTR.

PATTERN RANGE

ULTRAMELT crucibles are available in a wide range of optimised shapes and sizes to suit a broad spectrum of end user requirements. Heavy wall (HW) versions can be supplied for increased life in the most aggressive application and a range of integral pouring spouts are offered where required.

QUALITY

ULTRAMELT crucibles are manufactured from premium grade raw materials under an ISO 9001:2000 quality management system.



PREHEATING / FIRST USE

FUEL-FIRED: Crucibles should be pre-heated empty until they reach a uniform bright red colour (circa 900°C) in order to pre-condition the glaze. The pre-heating time will depend on the size of the crucible. In the case of large capacity crucibles and furnaces with high output burners the rate of temperature rise should be controlled in the initial stages to minimise thermal stress. The typical time taken from ambient to red heat is up to 1 hour. Avoid direct flame impingement on the crucible surface.

INDUCTION: The heat-up procedure is dependant on furnace frequency, coil dimensions, and the resistivity of the metal being melted. It is recommended where possible to preheat the crucible empty. The power input rate should initially be limited until the crucible becomes bright red over its entire surface. The time taken to pre-heat will depend on the size of the crucible, but is usually in the range 20 – 40 minutes. Once one third of the crucible is full of molten metal the power can be increased to a higher level. Silicon carbide crucibles absorb proportionally high levels of power from the induction field. Care should be taken not to overheat the crucible. The actual maximum power setting should be assessed from experience and will be dependant on the capacity of the crucible. The appearance of the inside wall of the crucible should be monitored for signs of over-heating and the power reduced once the full charge is molten.

CHARGING

As soon as the crucible has reached the specified pre-heat temperature, charge and melt immediately. Charge light scrap and returns first in order to form a cushion for heavier material. Use tongs to charge ingots and place large pieces and ingots vertically allowing space for expansion. Only add flux once the metal is molten.

FULL LINE OF CRUCIBLES AND ACCESSORIES TO MEET EVERY APPLICATION



| | | | | | |
|---|---|---|--|---|---|
| <p>EXCEL, HIMELT Crucibles</p>  <p>EXCEL, HIMELT Roller-Formed SiC</p> | <p>EXCEL E Crucibles</p>  <p>EXCEL E Roller-Formed SiC</p> | <p>INDUX Crucibles</p>  <p>INDUX Clay Graphite</p> | <p>ISO-ALUSTAR Crucibles</p>  <p>ISO-ALUSTAR ISO-Pressed Clay Graphite</p> | <p>SALAMANDER SUPER Crucibles</p>  <p>SALAMANDER SUPER Clay Graphite</p> | <p>ACCESSORIES Crucibles</p>  <p>ACCESSORIES</p> |
|---|---|---|--|---|---|



For additional information on Morgan MMS' products & services or to find a location nearest to you, please visit:

www.morganmms.com



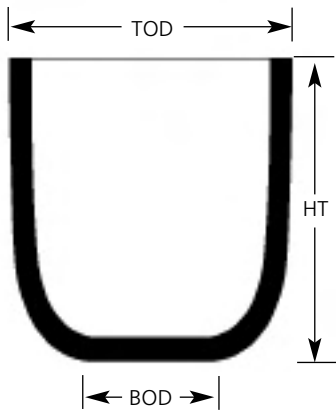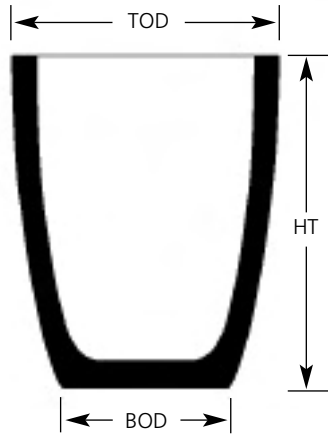

CRUCIBLES FOR LIFT OUT AND BALE OUT FURNACES

| Ultramelt A-SHAPES | TOD | HT | BOD | Wall | Brass Capacity | Brimful Capacity |
|---------------------------|-------------|-------------|-------------|-------------|-----------------------|-------------------------|
| | (mm) | (mm) | (mm) | (mm) | (kg) | (litres) |
| A60ULTR | 272 | 365 | 175 | 22.5 | 82.2 | 10.9 |
| A80ULTR | 301 | 400 | 195 | 24.5 | 105 | 14.0 |
| A80HWULTR | 301 | 400 | 196 | 36 | 86 | 11.4 |
| A425ULTR | 468 | 595 | 270 | 46 | 394 | 52.5 |
| A440ULTR | 468 | 615 | 270 | 46 | 411 | 54.7 |
| A465ULTR | 469 | 645 | 270 | 46 | 436 | 58.0 |
| A505ULTR | 470 | 690 | 270 | 46 | 476 | 63.3 |
| A560ULTR | 471 | 750 | 270 | 46 | 526 | 70.1 |
| A595ULTR | 472 | 790 | 270 | 46 | 561 | 74.6 |
| A655ULTR | 473 | 850 | 270 | 46 | 612 | 81.4 |
| A400ULTR | 505 | 650 | 280 | 34.5 | 522 | 69.4 |
| A500ULTR | 520 | 710 | 285 | 38 | 592 | 78.7 |
| A570ULTR | 552 | 650 | 300 | 48 | 647 | 86.1 |
| A580ULTR | 553 | 710 | 300 | 48 | 721 | 95.9 |
| A600ULTR | 554 | 760 | 300 | 48 | 782 | 104.1 |
| A690ULTR | 555 | 795 | 300 | 48 | 826 | 109.9 |
| A800ULTR | 555 | 820 | 300 | 48 | 857 | 114.0 |


CRUCIBLES FOR BALE OUT FURNACES

| Ultramelt BASINS | TOD | HT | BOD | Wall | Brass Capacity | Brimful Capacity |
|-------------------------|-------------|-------------|-------------|-------------|-----------------------|-------------------------|
| | (mm) | (mm) | (mm) | (mm) | (kg) | (litres) |
| B168ULTR | 525 | 492 | 305 | 32 | 368 | 56.0 |
| B171ULTR | 527 | 600 | 305 | 32 | 510 | 73.0 |
| B302ULTR | 605 | 630 | 368 | 42 | 826 | 109.9 |
| B302HWULTR | 605 | 630 | 368 | 51 | 761 | 101.2 |
| B503ULTR | 609 | 850 | 368 | 42 | 1175 | 157.5 |
| B503HWULTR | 609 | 850 | 368 | 51 | 1091 | 145.2 |
| B502ULTR | 610 | 900 | 368 | 42 | 1265 | 168.3 |

ULTRAMELT US


| BASIN SERIES | TOD | HT | BOD | Wall | Brass Capacity | Brimful Capacity |
|---------------------|-------------|-------------|-------------|-------------|-----------------------|-------------------------|
| | (mm) | (mm) | (mm) | (mm) | (kg) | (litres) |
| SC225TULTR | 423 | 527 | 317 | 52 | 256 | 34 |
| SC300TULTR | 470 | 584 | 340 | 52 | 377 | 50.1 |
| SC2650-700ULTR | 527 | 700 | 368 | 42 | 676 | 89.9 |
| SC2650-34ULTR | 527 | 863 | 368 | 42 | 863 | 114.8 |
| SC3400ULTR | 603 | 483 | 368 | 42 | 591 | 78.6 |
| SC3450ULTR | 604 | 534 | 368 | 42 | 672 | 89.4 |
| SC3500ULTR | 604 | 565 | 368 | 42 | 721 | 96.0 |
| SC600TULTR | 606 | 685 | 368 | 51 | 842 | 112.1 |
| SC3635ULTR | 607 | 710 | 368 | 42 | 954 | 127.0 |
| SC3750ULTR | 608 | 813 | 368 | 42 | 1121 | 149.2 |
| SC3750HWULTR | 608 | 813 | 368 | 51 | 1035 | 137.7 |
| SC800TULTR | 610 | 915 | 368 | 51 | 1190 | 158.3 |
| SC3800ULTR | 610 | 915 | 368 | 42 | 1287 | 171.3 |

All dimensions are subject to normal manufacturing tolerances. MORGANITE CRUCIBLE LTD reserves the right to change specifications at any time. Not responsible for any typographic errors.

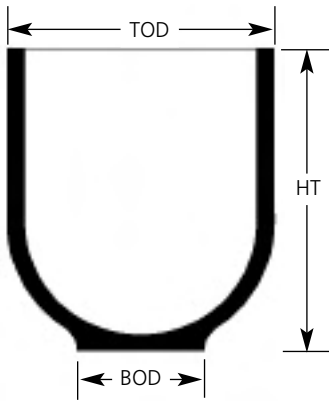


ULTRAMELT BN SHAPE

| | TOD | HT | BOD | Wall | Brass Capacity | Brimful Capacity |
|-----------|------|------|------|------|----------------|------------------|
| | (mm) | (mm) | (mm) | (mm) | (kg) | (litres) |
| BN500ULTR | 775 | 750 | 312 | 40 | 1599 | 220.0 |
| BN600ULTR | 780 | 900 | 312 | 40 | 2190 | 280.0 |

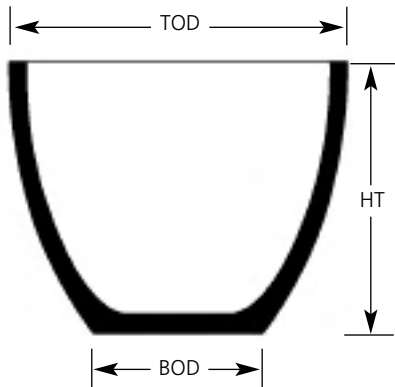





ULTRAMELT BOWL SERIES

| | TOD | HT | BOD | Wall | Brass Capacity | Brimful Capacity |
|-------------|------|------|------|------|----------------|------------------|
| | (mm) | (mm) | (mm) | (mm) | (kg) | (litres) |
| SB900BULTR | 883 | 648 | 368 | 45 | 1514 | 201.5 |
| SB1000BULTR | 885 | 712 | 368 | 45 | 1752 | 233.2 |
| SC41200ULTR | 886 | 826 | 368 | 45 | 2179 | 289.9 |

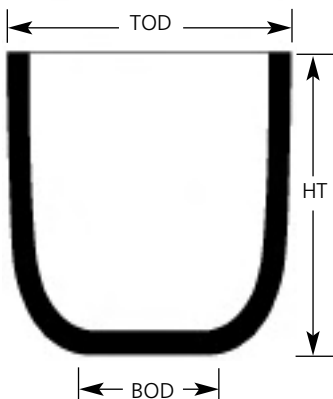

ULTRAMELT 3000 BASIN SERIES

| | TOD | HT | BOD | Wall | L | Brass Capacity | Brimful Capacity |
|---------------|------|------|------|------|------|----------------|------------------|
| | (mm) | (mm) | (mm) | (mm) | (mm) | (kg) | (litres) |
| SC30630ULTR | 711 | 597 | 383 | 44 | | 1085 | 144.4 |
| SC30720ULTR | 713 | 670 | 383 | 43 | | 1253 | 166.7 |
| SC30765ULTR | 714 | 692 | 383 | 43 | | 1304 | 173.5 |
| SC30810ULTR | 715 | 730 | 383 | 43 | | 1389 | 184.8 |
| SC31000ULTR | 719 | 900 | 383 | 43 | | 1791 | 238.3 |
| SC31000FLULTR | 719 | 900 | 383 | 43 | 325 | 1649 | 219.4 |
| SC31100FLULTR | 720 | 949 | 383 | 43 | 325 | 1765 | 234.9 |
| SC31100HWULTR | 720 | 949 | 383 | 57 | | 1707 | 227.2 |
| SC31150ULTR | 721 | 975 | 383 | 42 | | 1970 | 262.1 |
| SC31150HWULTR | 721 | 975 | 383 | 57 | | 1764 | 234.7 |
| SC31270ULTR | 723 | 1041 | 383 | 42 | | 2129 | 283.3 |
| SC31270HWULTR | 723 | 1041 | 383 | 57 | | 1908 | 253.9 |
| SC31400ULTR | 725 | 1143 | 383 | 41 | | 2377 | 316.3 |
| SC31450ULTR | 726 | 1168 | 383 | 41 | | 2438 | 324.4 |
| SC31450HWULTR | 726 | 1168 | 383 | 56 | | 2188 | 291.1 |

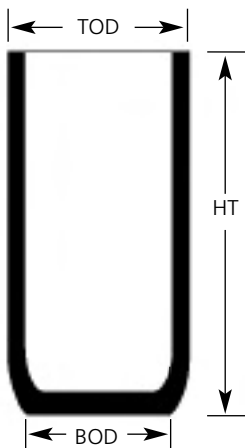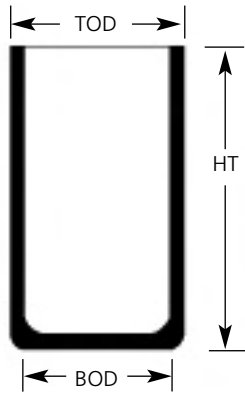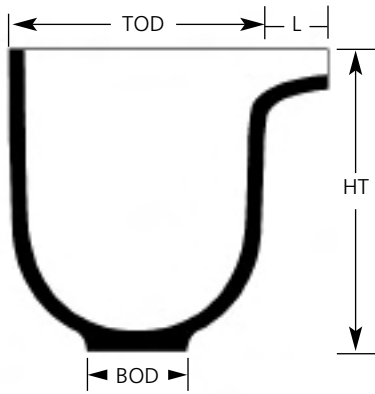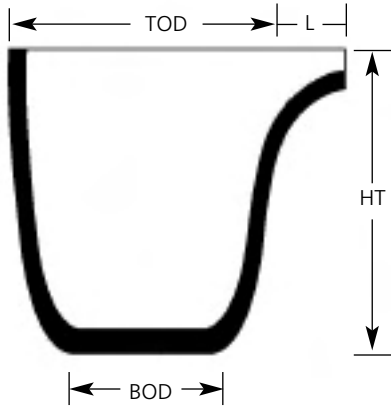

CRUCIBLES FOR TILTING FURNACES


| ULTRAMELT SPOUTED CRUCIBLES | TOD | HT | BOD | Wall | L | Brass Capacity | Brimful Capacity |
|------------------------------------|-------------|-------------|-------------|-------------|-------------|-----------------------|-------------------------|
| | (mm) | (mm) | (mm) | (mm) | (mm) | (kg) | (litres) |
| TP80HWULTR | 301 | 400 | 196 | 36 | 280 | 57 | 9.8 |
| SC225TFLULTR | 423 | 527 | 317 | 52 | 292 | 229 | 30.5 |
| TP843ULTR | 432 | 973 | 216 | 40 | 146 | 249 | 38.7 |
| SC300TFLULTR | 470 | 584 | 340 | 52 | 292 | 335 | 45.8 |
| SC301TFLULTR | 470 | 584 | 340 | 52 | 325 | 282 | 43.8 |
| TP287ULTR | 520 | 600 | 368 | 42 | 146 | 411 | 60.4 |
| SC430TFLULTR | 521 | 635 | 368 | 51 | 294 | 503 | 66.9 |
| TP89ULTR | 555 | 820 | 300 | 48 | 146 | -735 | 97.8 |
| TP387ULTR | 605 | 630 | 368 | 42 | 146 | 698 | 92.9 |
| SC600TFLULTR | 606 | 685 | 368 | 51 | 294 | 781 | 103.9 |
| TP412ULTR | 608 | 800 | 368 | 42 | 146 | 1100 | 146.4 |
| SC700TFLULTR | 608 | 813 | 368 | 51 | 320 | 943 | 125.5 |
| TP512ULTR | 610 | 900 | 368 | 42 | 146 | 1202 | 160.0 |
| SC800TFLULTR | 610 | 915 | 368 | 51 | 294 | 1127 | 150.0 |
| SC801TFLULTR | 610 | 915 | 368 | 51 | 320 | 1098 | 146.1 |

| ULTRAMELT TBN SPOUTED SERIES | TOD | HT | BOD | Wall | L | Brass Capacity | Brimful Capacity |
|-------------------------------------|-------------|-------------|-------------|-------------|-------------|-----------------------|-------------------------|
| | (mm) | (mm) | (mm) | (mm) | (mm) | (kg) | (litres) |
| TBN387ULTR | 615 | 630 | 246 | 33 | 146 | 762 | 109.0 |
| TBN412ULTR | 615 | 800 | 246 | 37 | 170 | 999 | 137.0 |
| TBN587ULTR | 780 | 900 | 312 | 40 | 170 | 1571 | 217.0 |
| TBN730ULTR | 850 | 990 | 350 | 40 | 184 | 2164 | 259.0 |

CRUCIBLES FOR TILTING INDUCTION FURNACES

| ULTRAMELT INDUCTION CYLINDERS | TOD | HT | BOD | Wall | Brass Capacity | Brimful Capacity |
|--------------------------------------|-------------|-------------|-------------|-------------|-----------------------|-------------------------|
| | (mm) | (mm) | (mm) | (mm) | (kg) | (litres) |
| E323ULTR | 165 | 318 | 165 | 17 | 23 | 4.0 |
| E444ULTR | 254 | 475 | 254 | 19 | 93 | 16.0 |
| SI576-22ULTR | 406 | 559 | 269 | 33 | 262 | 44.8 |
| SI576ULTR | 410 | 673 | 269 | 33 | 323 | 55.3 |
| SC225TULTR | 423 | 527 | 317 | 52 | 256 | 34.0 |
| SI581-565ULTR | 460 | 565 | 293 | 38 | 331 | 56.6 |
| SI581-26ULTR | 464 | 660 | 293 | 38 | 395 | 67.6 |
| SI581-28ULTR | 466 | 711 | 293 | 38 | 431 | 73.7 |
| SI581ULTR | 470 | 845 | 293 | 38 | 524 | 89.7 |
| SIA819-22ULTR | 608 | 559 | 470 | 42 | 560 | 95.8 |
| SIA819ULTR | 608 | 813 | 470 | 42 | 875 | 149.7 |
| SIA819HWULTR | 608 | 813 | 470 | 51 | 847 | 144.9 |
| SC3034ULTR | 609 | 864 | 470 | 42 | 939 | 160.7 |
| SC3034HWULTR | 609 | 864 | 470 | 51 | 907 | 155.1 |
| SC3036ULTR | 610 | 914 | 470 | 42 | 1003 | 171.6 |
| SC3036HWULTR | 610 | 914 | 470 | 51 | 966 | 165.3 |
| SC3039ULTR | 611 | 990 | 470 | 42 | 1099 | 188.0 |
| SC6029ULTR | 644 | 736 | 546 | 51 | 870 | 148.8 |
| SC6030ULTR | 644 | 762 | 546 | 51 | 904 | 155.0 |
| SC6038ULTR | 650 | 959 | 546 | 51 | 1174 | 200.8 |
| E9053ULTR | 905 | 1320 | 800 | 55 | 3534 | 604.6 |
| E9050ULTR | 905 | 1850 | 800 | 50 | 5090 | 870.8 |
| E9051ULTR | 905 | 1900 | 800 | 50 | 5238 | 896.2 |

All dimensions are subject to normal manufacturing tolerances. MORGANITE CRUCIBLE LTD reserves the right to change specifications at any time. Not responsible for any typographic errors.

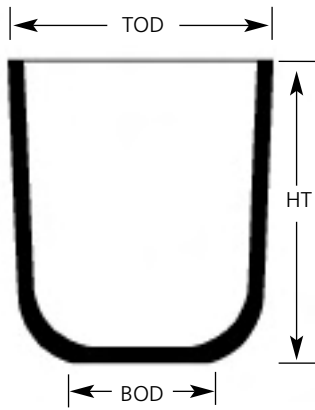

| ULTRAMELT 50000 INDUC- TION SERIES | TOD | HT | BOD | Wall | Brass Capacity | Brimful Capacity |
|--|------|------|------|------|-------------------|---------------------|
| | (mm) | (mm) | (mm) | (mm) | (kg) | (litres) |
| SC38.5X30ULTR | 962 | 762 | 734 | 55 | 2209 | 378.0 |
| SC38.5X32ULTR | 964 | 813 | 734 | 55 | 2370 | 405.5 |
| SC38.5X37ULTR | 967 | 940 | 734 | 55 | 2807 | 480.3 |
| SC38.5X40ULTR | 968 | 1016 | 734 | 55 | 3063 | 524.0 |
| SC38.5X58ULTR | 978 | 1473 | 734 | 55 | 4597 | 786.5 |
| SC50064ULTR | 978 | 1626 | 734 | 55 | 5173 | 885.0 |



Brass capacity is calculated as follows:

A-Shapes: 90% of brimful

Basins and Bowls: With a freeboard of 75mm

Spouted crucibles: With a freeboard of 75mm measured from the bottom of the spout pouring gap

Cylinders: 70% of brimful

All dimensions are subject to normal manufacturing tolerances

Morganite also supplies a complete range of stands to provide uniform heating and appropriate mechanical support of the crucible base

INSTALLATION

The stand should be made from the same material as the crucible to ensure uniform heating of the crucible base and provide sufficient mechanical support. The diameter of the stand should be at least the same as the base of the crucible and the height should be such that the base of the crucible is level with the centre line of the burner. The stand and crucible should be installed centrally in the furnace.

TILTING FURNACES

Cement the stand on the floor of the furnace and ensure that it is central and level. Place the crucible centrally on the stand and use a thin layer of Morcem 900 cement to bond the crucible and stand together. Use three equi-spaced grip bricks positioned 75mm below the rim of the crucible, leaving a 6-10mm gap between these and the crucible wall for expansion. Insert cardboard spacers in the gap. Leave a clear 38mm space under the spout to prevent the crucible from "hanging up" on the spout. After the crucible and accessories have been installed, initially fire the furnace slowly in order to release moisture and to set the cement.

INDUCTION FURNACES

Cylindrical crucibles are installed in tilting furnaces with a protective layer of back-up material, which should be refractory in composition (e.g. magnesite) with no sintering additives.

Back-up thickness is determined by crucible size. A slip plane of mica or glass fibre wool should first be installed against the furnace wall. A layer of back-up is placed in the base of the furnace to support the crucible and establish it at the correct height. The "star wires" are positioned to make contact with the crucible base in order to provide earth leakage protection. The crucible is lowered and centred in the furnace and back-up material is then added in layers approximately 50mm thick, de-aired and compacted using a forked tool, with each layer scored to provide a key for the next layer. The top of the crucible and back-up lining are sealed in position using plastic refractory. Ultramelt crucibles can be supplied with an integral spout, or alternatively a pouring spout can be fashioned using plastic refractory.

CLEANING OUT

Crucibles should be cleaned out carefully between melts while red hot in order to remove any build-up of corrosive slag. Crucibles should be cleaned in the horizontal position where possible.

SAFETY

Proper safety clothing must be worn at all times. Ensure that no moisture is introduced into the melt. Provision should be made underneath the furnace to catch metal that may be discharged.

CRUCIBLE CARE



Store crucibles off the floor in a dry, warm place.



Do not nest one inside another. Separate layers with hardboard.



Do not roll crucibles. Move using a sack truck with padding.



Check thoroughly for cracks or damage before use.



Use the correct crucible stand which must be central and support the whole base.



Allow space for expansion between crucible and furnace lining/cover.



Use correctly positioned grip bricks in tilting furnaces, leaving gaps for expansion. Do not hang crucible on spout.



The flame path must be tangential to the crucible.




Ingots should be loaded carefully into the crucible using tongs.



First charge with light returns, as a cushion, then add ingots vertically.



Only add flux after the metal is molten.



Avoid ingress of cold air by ensuring that the drain hole is sealed.



Lift-out tongs should hold crucible on its lower third and fit evenly on both sides.



The crucible must be emptied before switching off the furnace.



The crucible should be cleaned out carefully every day while still red hot.



DISTRIBUTED BY



MORGANITE CRUCIBLE LTD

Woodbury Lane, Norton, Worcester, WR5 2PU, ENGLAND

Tel: +44 (0) 1905 728200 • Fax: +44 (0) 1905 767877 • www.morganmms.com

